



NTC195 VANA Test Cable to 26.5 GHz

PHASE MOVEMENT AND RECOVERY vs. FREQ.
TYPICAL 3 FT FLEXCO NETWORK ANALYZER CABLE

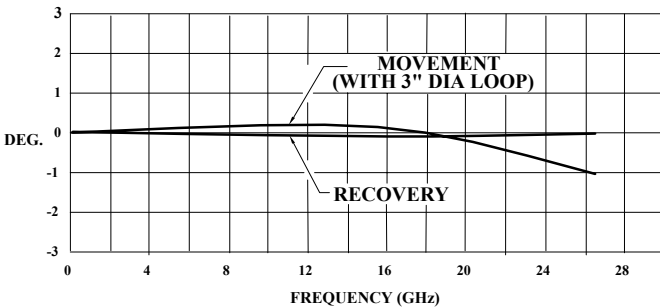


NTC195 VANA Test cables exhibit excellent phase stability when flexed permitting truly accurate measurements.

AMPLITUDE STABILITY VS. FREQUENCY
TYPICAL 3 FT FLEXCO NETWORK ANALYZER CABLE

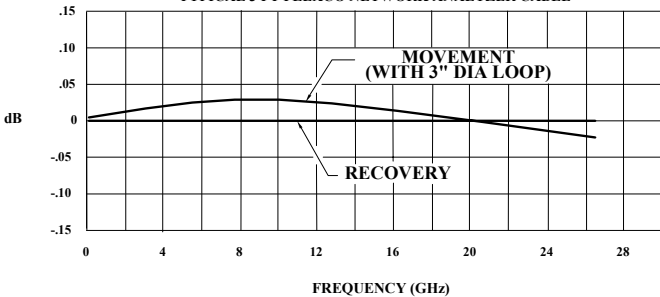

Change in amplitude measures less than 0.05 dB when flexed and returns virtually to zero when uncoiled.

VOLTAGE STANDING-WAVE RATIO vs. FREQ.
TYPICAL 3 FT FLEXCO NETWORK ANALYZER CABLE

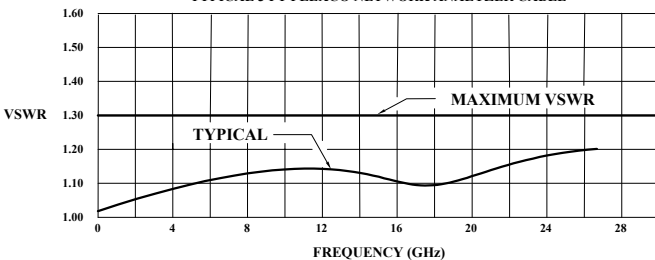


Typical VSWR compared to maximum specification. VSWR remains constant during flexing.

Electrical Characteristics:

Nominal Impedance:	50Ω
Velocity of Propagation:	74%
Effective Dielectric Constant:	1.83
Time Delay:	1.37 ns/ft
Shielding Effectiveness:	-90 dBc min.
Nominal Capacitance:	28 pF/ft
Dielectric Withstanding Voltage:	0.5 KV (rms)
Maximum Frequency:	26.5 GHz
Ø vs. Min. Bend Radius:	1° max. to 26.5 GHz
Maximum VSWR:	1.30:1

Insertion loss values at specific frequencies can be calculated by using the information provided on the *FC195 Flexible Coaxial Cable* specification sheet.

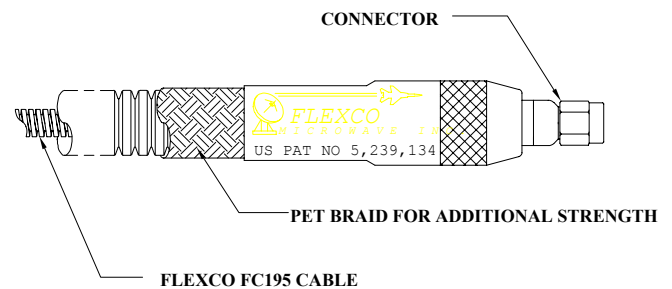

Physical Characteristics:

Center Conductor:	Stranded Silver Plated Copper (SPC) per ASTM-B8
Dielectric:	PTFE per L-P-403
Outer Conductor:	Strip wound oxygen free Copper per UNS 10200
Min. Bend Radius:	1.5"
Operating Temperature:	-40°C to +120°C
Protective Jacketing:	Non-metallic corrugated tubing
Outer Braid:	Polyester - PET
Cable Assembly Outer Diameter:	0.50" nominal

Available Connectors:

3.5 mm:	Plug, Jack, NMD
SMA:	Plug, Jack
N:	Plug, Jack
APC-7:	Sexless
K:	Plug, Jack, NMD
2.4 mm:	Plug, Jack, NMD
TNC:	Plug

Please refer to Table 1 in the *Ordering Information* section for maximum connector frequencies and Flexco designation.